

## AM Deactivator XAMD-1



**Cross Point AM Deactivator XAMD-1 is a stand-alone combined label detector and label deactivator, designed for reliable detection and deactivation of AM labels.**

Deactivation occurs automatically after a label is presented. After deactivation, a green light and buzzer notify the user about a successful deactivation. A red light and buzzer notify the user about a failed deactivation.

The optional notification box can easily be connected to the deactivator unit through its extension cable. The notification box also contains a green and red LED and a buzzer and will provide the visual and audible notifications. Furthermore, it is equipped with a key switch, which allows store employees to disable deactivation in those moments that employees are not present at the cash desk. This is to avoid unauthorised deactivation by non-store employees or to use the deactivator as a Double Checker.

The AM Deactivator XAMD-1 is designed to be mounted recessed in the desktop. Its small height and smooth surface provide easy and non-obstructed deactivation of secured items. The optional notification box can be applied to provide the necessary deactivation feedback.

### Unique features

---

Quick and smooth deactivation

---

Distinction between successful and failed deactivations

---

Automatic synchronization with other AM systems


---

Tag in field detection

---

Optional external notification box, Double Checker option

---

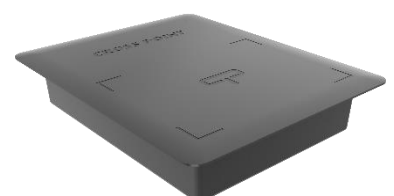

# AM Deactivator XAMD-1

## Features

### AM Deactivator XAMD-1

Detection before deactivation	●
Adjustable detection distance	●
Distinction between successful and failed deactivations with LED indication	●
Tag in field detection	●
Automatic synchronization with AM systems	●
Integrated power supply	●
Recessed mounting in desktop	●
Smooth surface and thin deactivation plate	●
External notification box with key switch, Double Checker option	○

## Detection & deactivation distance

Detection of DR label <sup>1</sup>	Up to 10 cm
Deactivation of DR label <sup>1</sup>	Up to 10 cm

## Specifications

Controller box (L / H / D)	244 / 199 / 47 mm
Weight	1.4 kg
Operating frequency	58 kHz
Power supply (internal)	115 VAC or 230 VAC
Ambient temperature	0°C to 50°C
Relative humidity	0% to 90%, non-condensing
Double sided fixation tape for recessed mounting (not included)	3M™ VHB™ Acrylic Foam Tape 5608A

● standard available

○ optional

- not available

<sup>1</sup> Fully coupled and depending on label quality and environment